
WESTERN DIGITAL CORPORATION W D 8 0 0 3 E P

Card Type NIC Type Maximum Onboard Memory Boot ROM Network Transfer Rate Topology Wiring Type

Network Interface Card Ethernet 16KB ROM, 8KB RAM Available 10Mbps Linear AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial 8-bit ISA

Data Bus

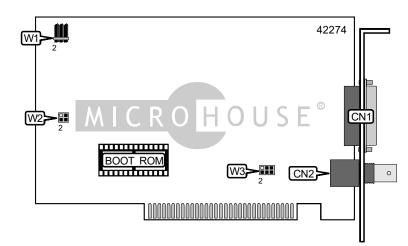

| CONNECTIONS | | | | |
|--------------------------------|-------|------------------------|-------|--|
| Function | Label | Function | Label | |
| AUI transceiver via DB-15 port | CN1 | RG-58A/U 50ohm coaxial | CN2 | |

| CABLE TYPE SELECTION | | | | |
|---|--------------------------|--|--|--|
| Туре | W3 | | | |
| AUI transceiver via DB-15 port Pins 1 & 3, 2 & 4 closed | | | | |
| í RG-58A/U 50ohm coaxial | Pins 3 & 5, 4 & 6 closed | | | |

| RAM ADDRESS SELECTION | | | | | |
|-----------------------|-----------------------|-----------------------|-------------------|--|--|
| Address | Base I/O | IRQ | W1 | | |
| Software configurable | Software configurable | Software configurable | Pins 1 & 2 closed | | |
| CA000h | 300h | IRQ5 | Pins 5 & 6 closed | | |
| í D0000h | 280h | IRQ3 | Pins 3 & 4 closed | | |

| RAM ADDRESS SELECTION | | | | |
|-----------------------|-------------------|--|--|--|
| Address | W2 | | | |
| Software configurable | Pins 1 & 2 closed | | | |
| í D8000h | Pins 3 & 4 closed | | | |